

Figure 1 Configuration of network

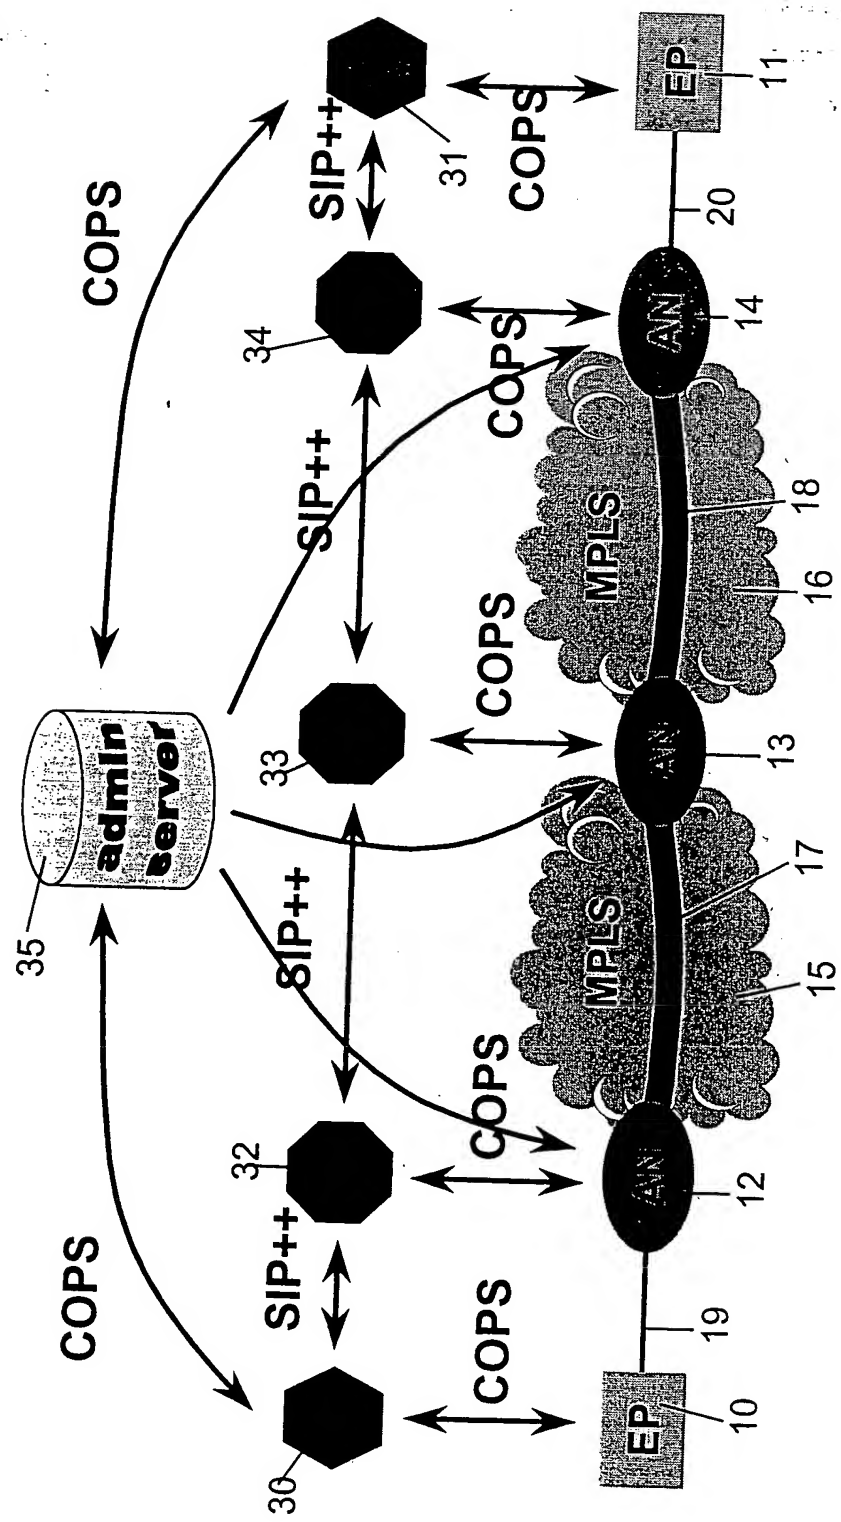


Figure 2 - Dynamic LSP addition

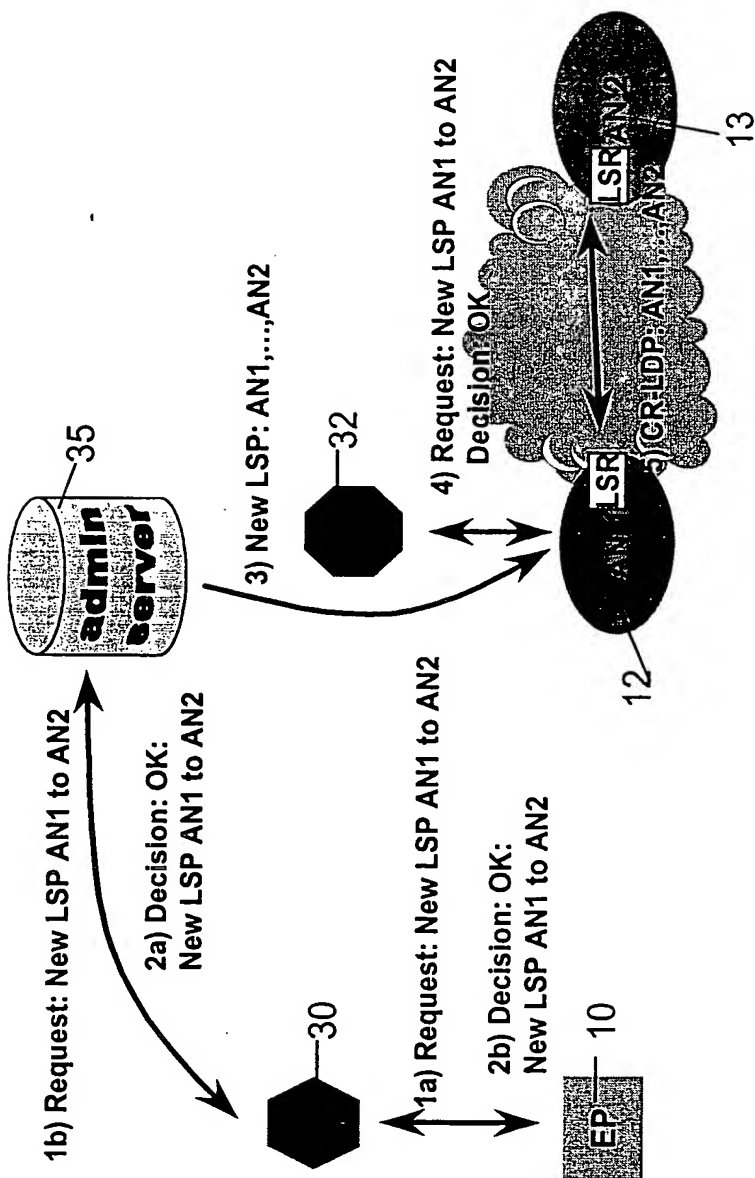


Figure 3 Basic SIP operation with a proxy

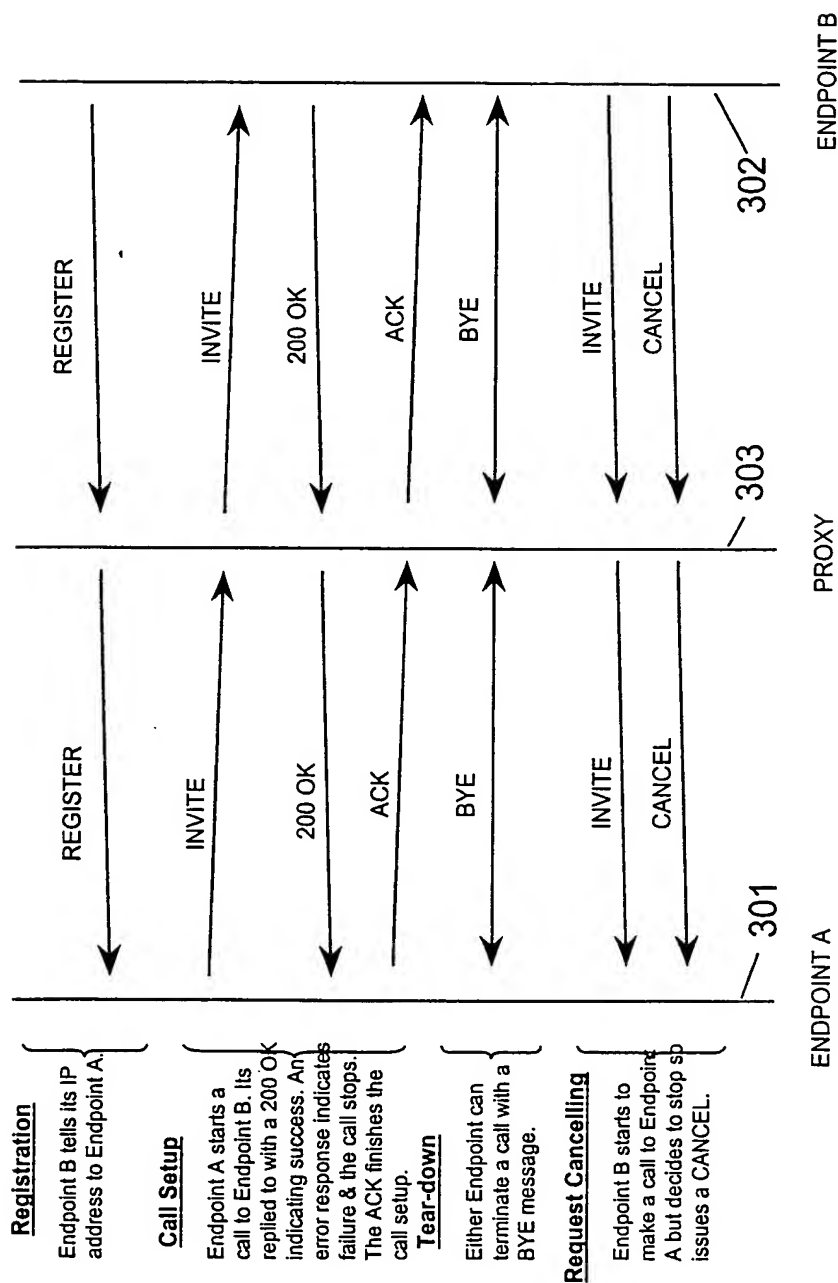


Figure 4 Record-Route header to track route

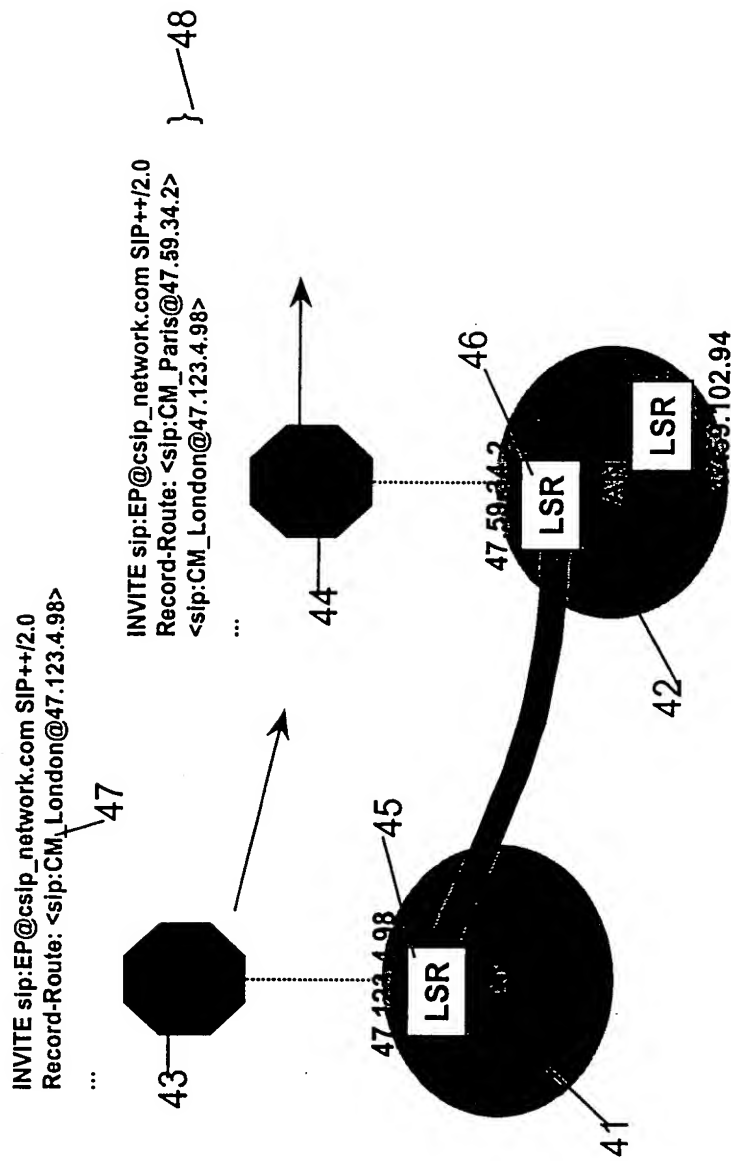


Figure 5 - Forking with non explicit Abstract Nodes

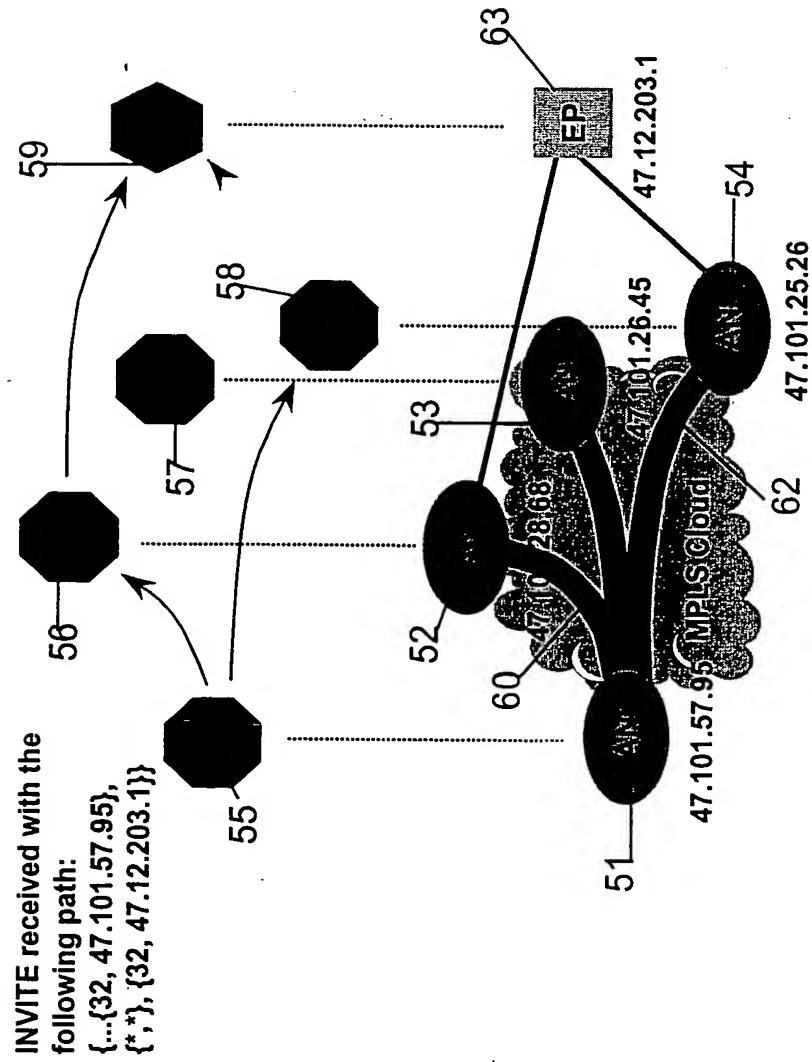


Figure 6 Forming path element from Record-Route header

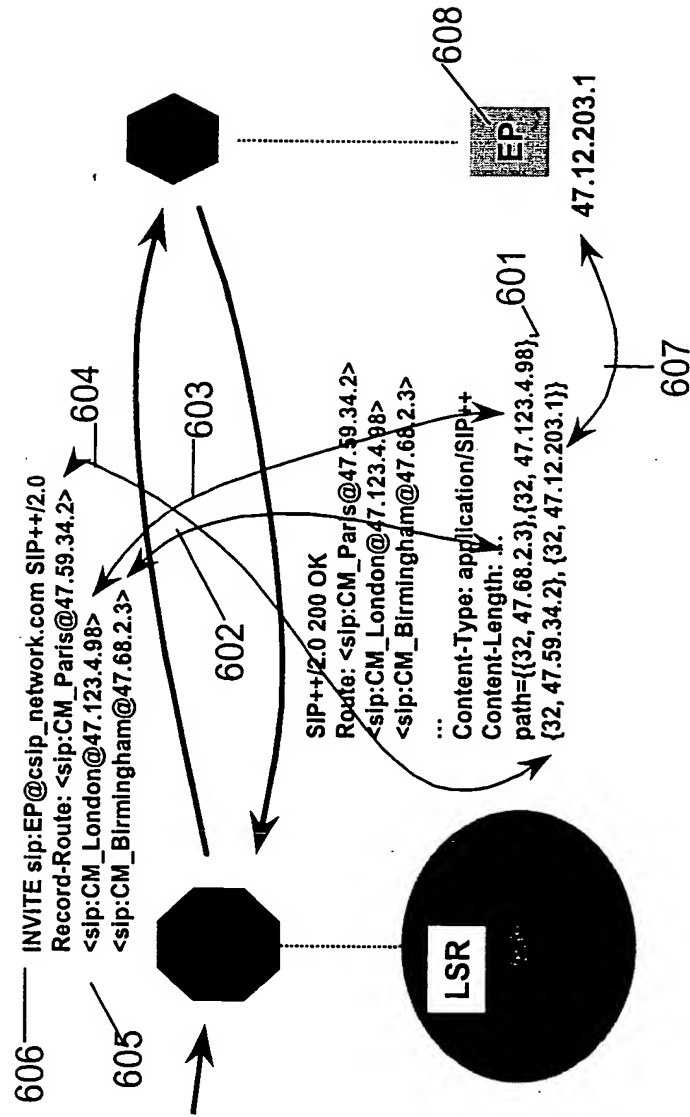


Figure 7 - COPS basic model

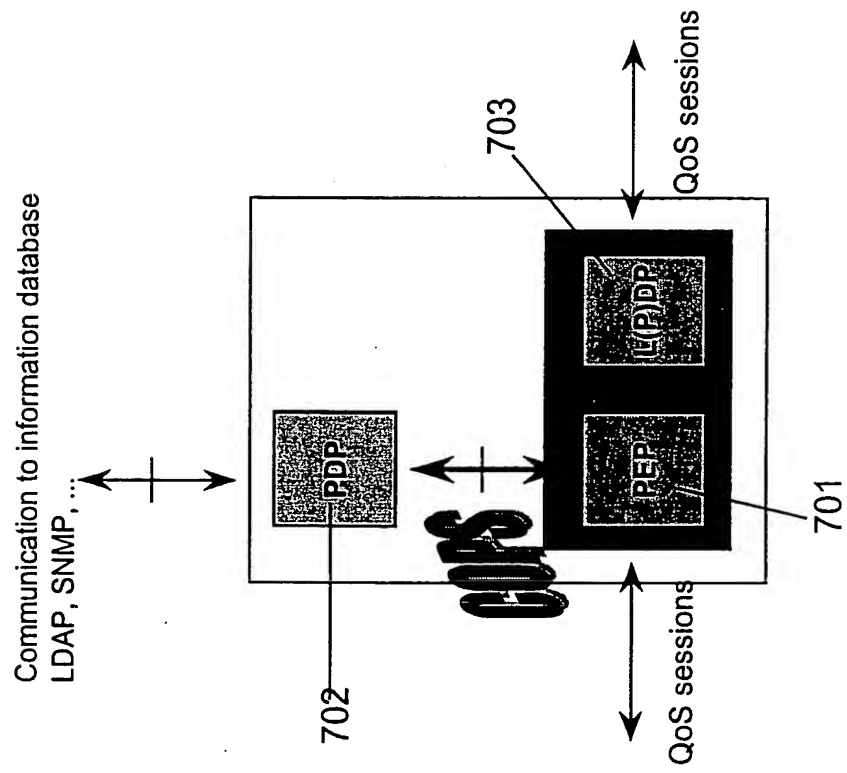


Figure 8 COPS messaging

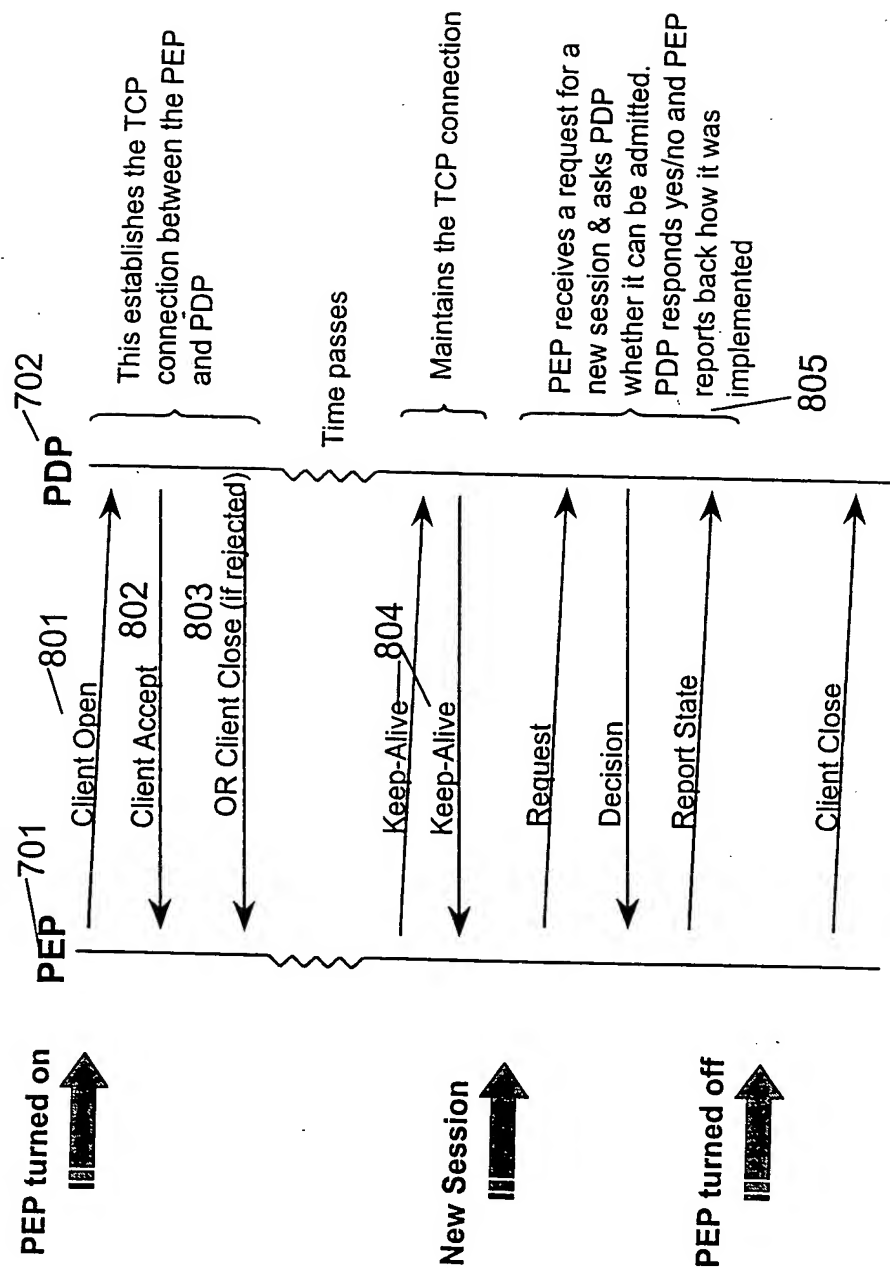




Figure 9 - CR-LDP path setup


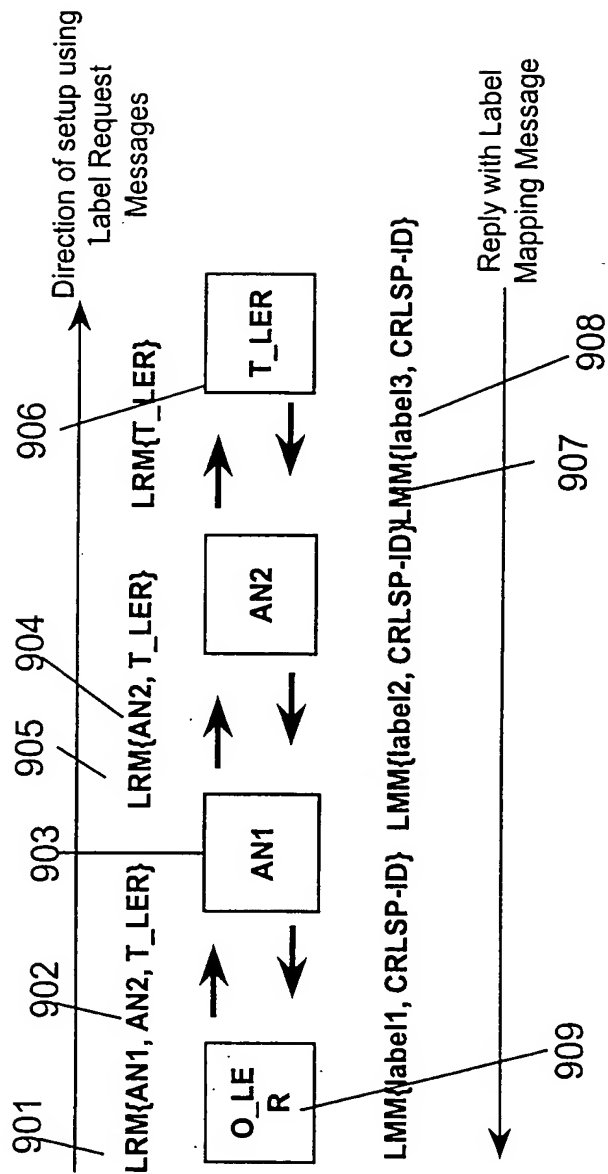


Figure 10 - Session setup signalling

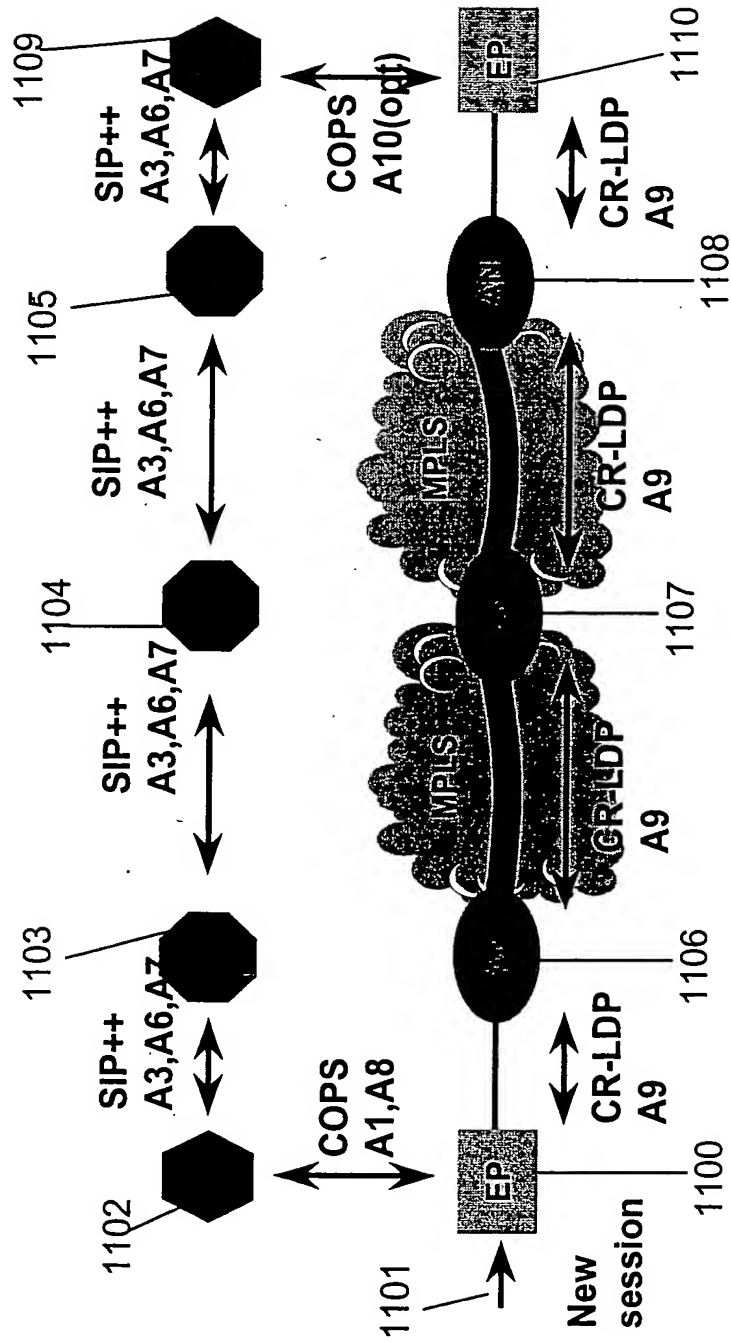

11/16

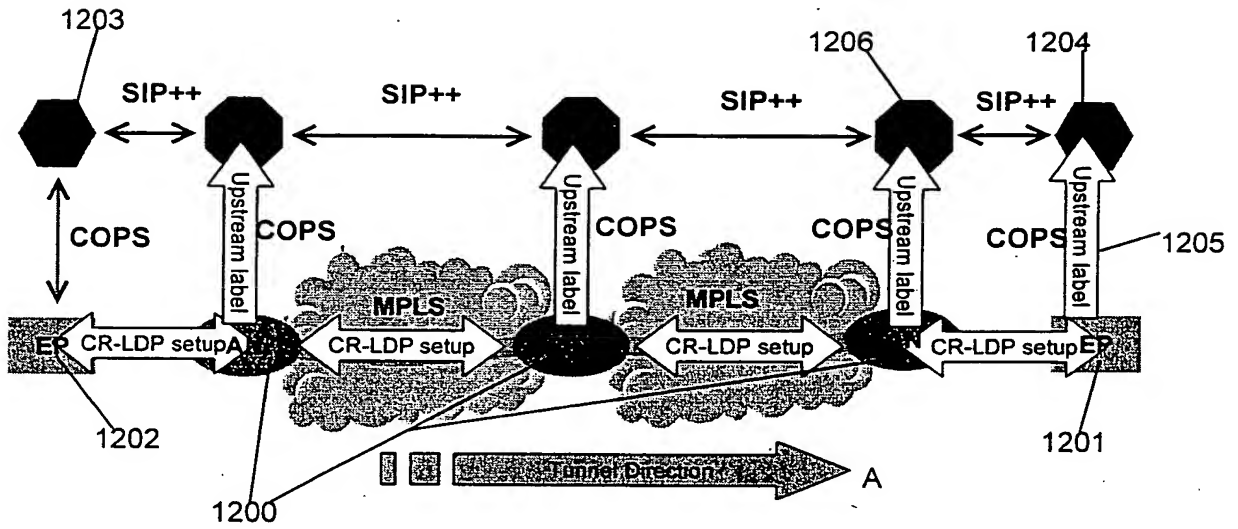


Figure 11

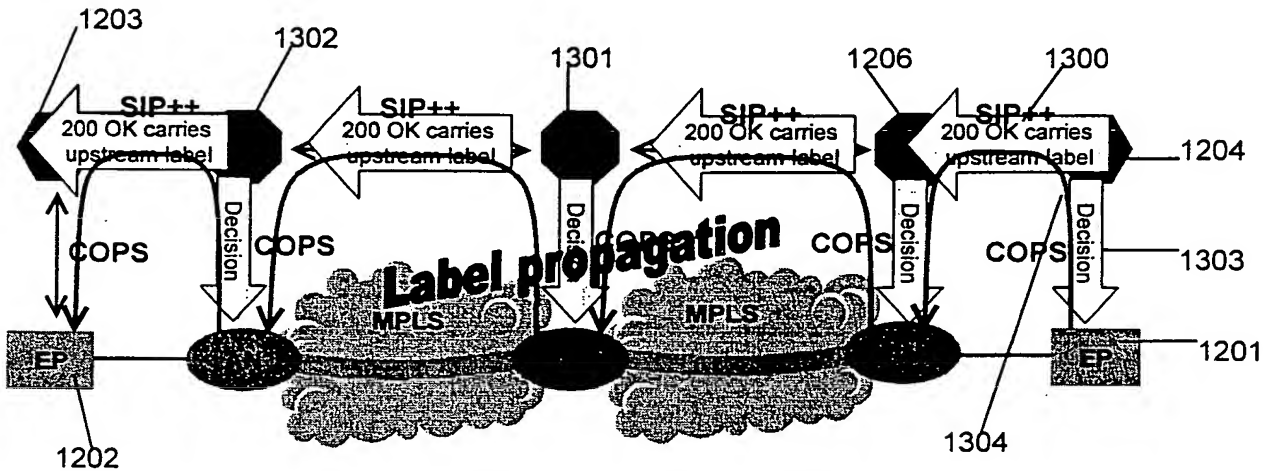


Figure 12

BEST AVAILABLE COPY

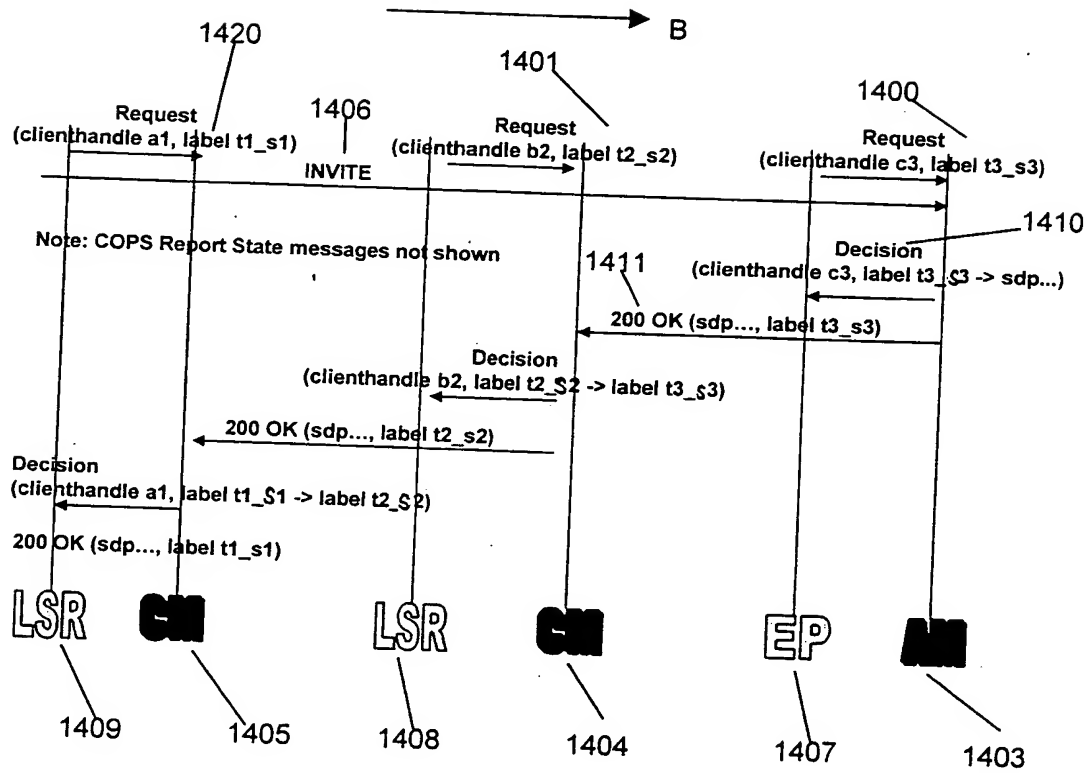


Figure 13

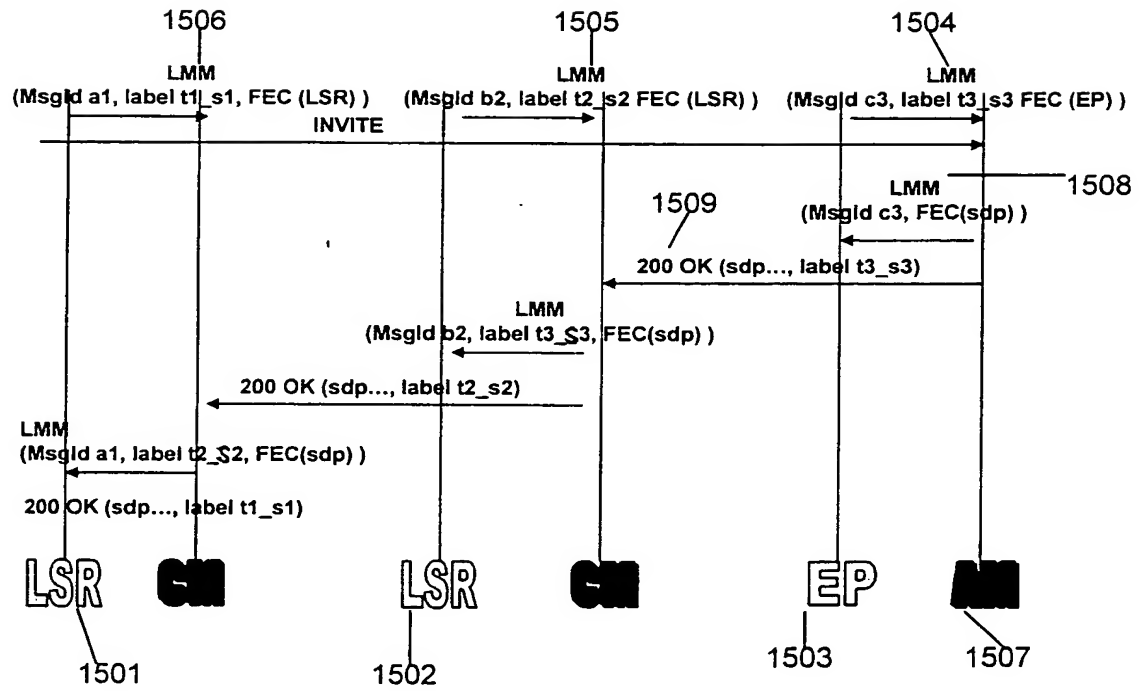


Figure 14

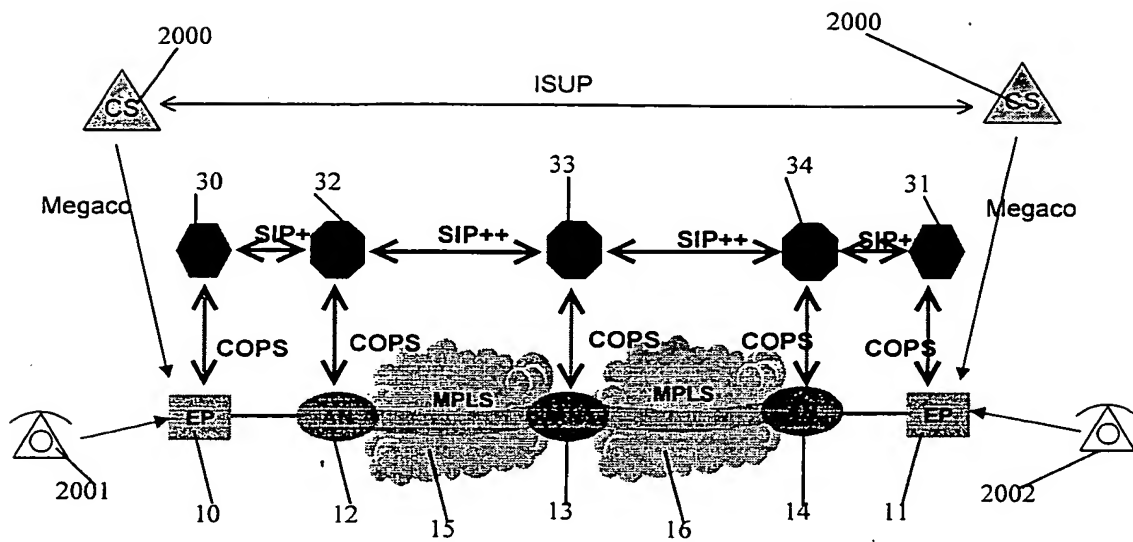


FIGURE 15

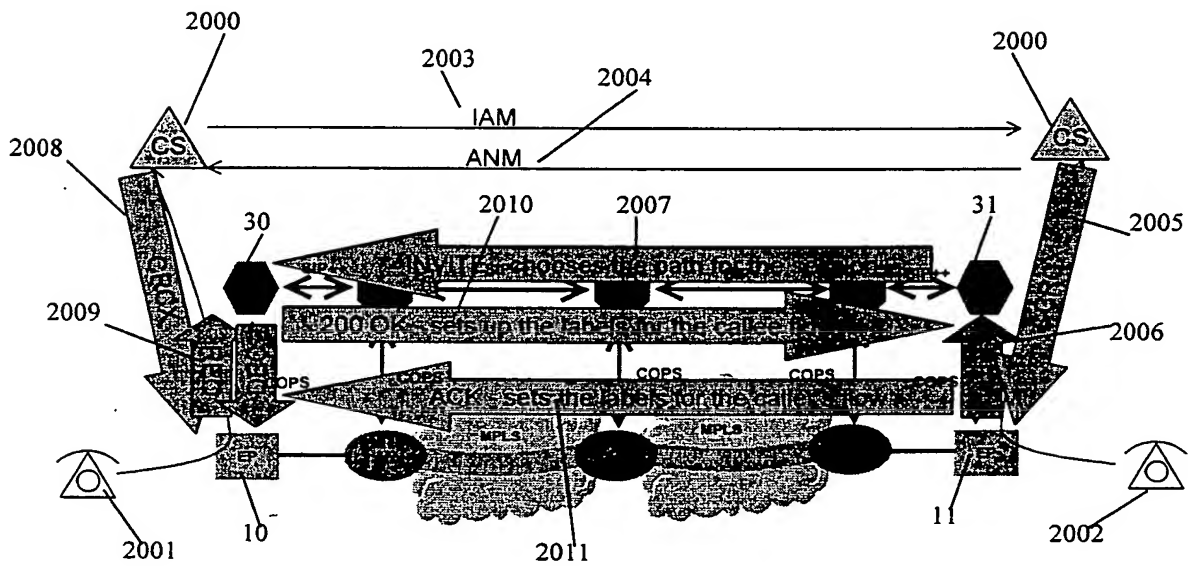


Figure 16

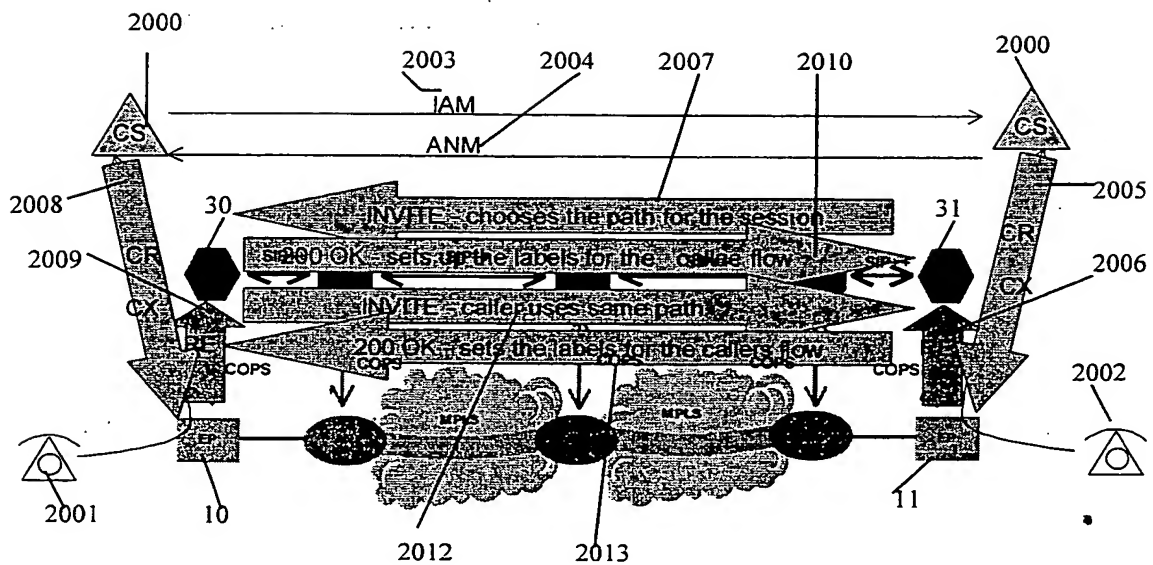


Figure 17

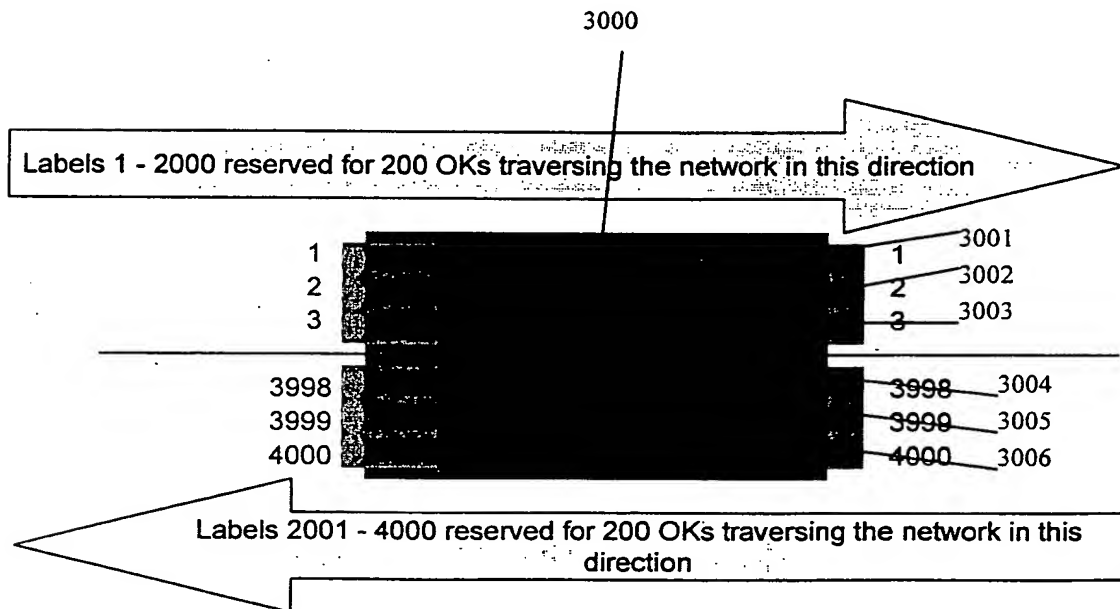


Figure 18

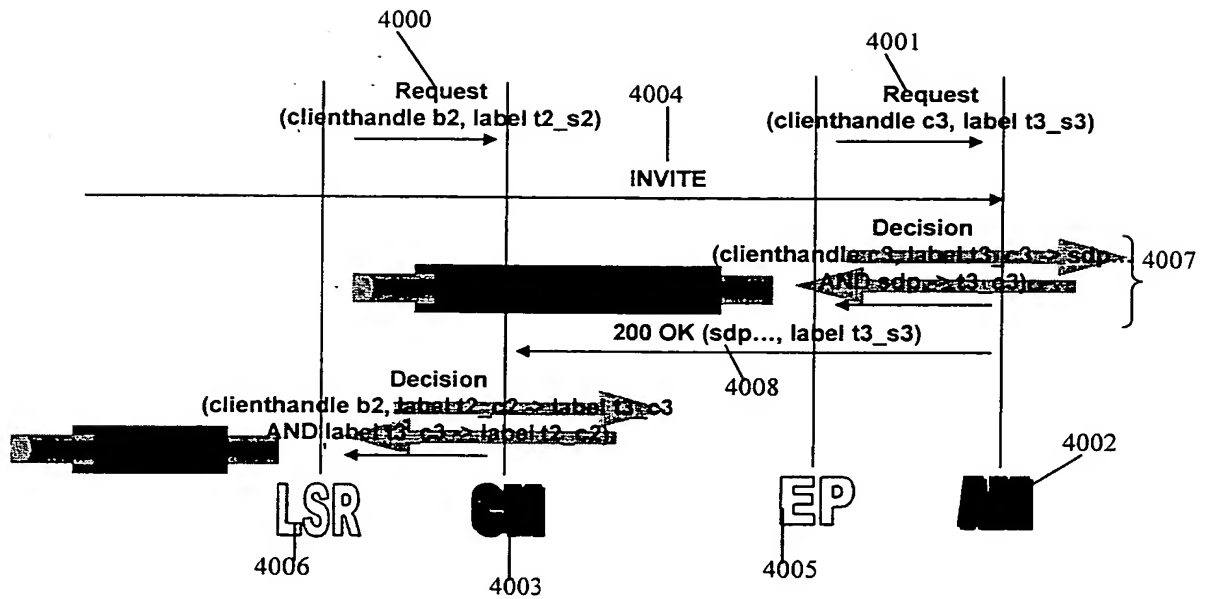


Figure 19

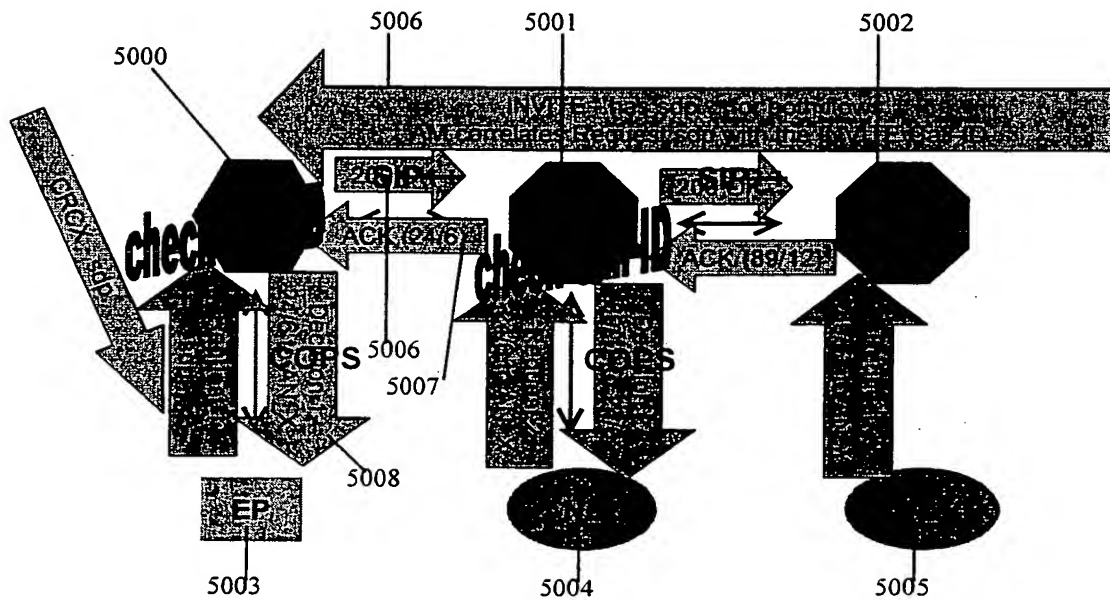


Figure 20